




Surface Mount Schottky Rectifier

Features

- Low profile package
- Ideal for automated placement
- Guardring for overvoltage protection
- Low power losses, high efficiency
- High forward surge capability
- Meets MSL level 1, per J-STD-020, LF maximum peak of 260 °C

DO-214AA (SMB)

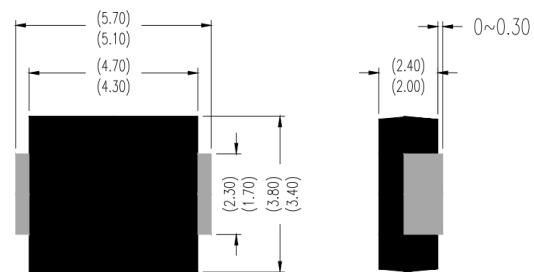


Typical Applications

For use in low voltage high frequency inverters, freewheeling, DC/DC converters, and polarity protection applications.

Mechanical Data

- **Package:** DO-214AA (SMB)
Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant, halogen-free
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102
- **Polarity:** Cathode line denotes the cathode end

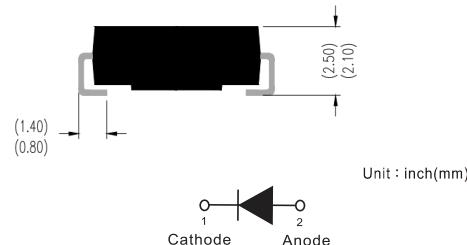

Unit : inch(mm)

■Maximum Ratings ($T_a=25^\circ\text{C}$ Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	SS22B	SS23B	SS24B	SS25B	SS26B	SS28B	SS210B	SS215B	SS220B
Repetitive peak reverse voltage	V_{RRM}	V	20	30	40	50	60	80	100	150	200
Average rectified output current @60Hz sine wave, resistance load, TL (FIG.1)	I_o	A						2.0			
Surge(non-repetitive)forward current @60Hz half-sine wave, 1 cycle, $T_a=25^\circ\text{C}$	I_{FSM}	A					50				
Storage temperature	T_{stg}	°C				-55	~+150				
Junction temperature	T_j	°C			-55	~+150			-55	~+175	

■Electrical Characteristics ($T_a=25^\circ\text{C}$ Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	TEST CONDITIONS	SS22B	SS23B	SS24B	SS25B	SS26B	SS28B	SS210B	SS215B	SS220B
Maximum instantaneous forward voltage drop per diode	V_F	V	$I_{FM} = 2.0\text{A}$		0.55		0.70		0.85		0.95	
Maximum DC reverse current at rated DC blocking voltage per diode@ $V_{RM}=V_{RRM}$	I_{RRM}	mA	Ta=25°C		0.50				0.10			
			Ta=100°C		10				5			

■Thermal Characteristics ($T_a=25^\circ\text{C}$ Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	SS22B	SS23B	SS24B	SS25B	SS26B	SS28B	SS210B	SS215B	SS220B
Thermal resistance	$R_{\theta J-A}$	°C/W				75 ⁽¹⁾					
	$R_{\theta J-L}$					17 ⁽¹⁾					

Note:

(1) Thermal resistance from junction to ambient and from junction to lead mounted on P.C.B. with 0.2" x 0.2" (5.0 mm x 5.0 mm) copper pad areas



■ Characteristics(Typical)

